

## 8 Ports PoE Ethernet Industrial Grade Switch

Full Gigabit managed PoE+ access switch



- Provide 4 optical SFP uplink ports;
- Provide 8 x 10 / 100 / 1000 Mbps adaptive downlink ports, all support IEEE802.3 af / at;
- Support port (Auto MDI / MDIX) function;
- Standard DC port and green terminal port, support power adapter with different connectors power;
- Redundant power design, support power hot backup;
- Fanless wavy metal shell with heat dissipation design ;
- Fast installation and easy operation, convenient for wall, din rail and desktop installation.

### Introduction

The S2008-150-V2 is an 8 Ports Industrial Full Gigabit PoE Managed Switch which provide 8\* 10/100/1000Base-T Ethernet ports (PoE / PoE+) and 4 \* 1000BASE-X SFP ports (Unlinks). The switch provides up to 4 Mbit cache supporting 4K high-definition video transmission. Besides, the 8 downlink PoE ports support IEEE802.3 af/at standard. PoE output power of single port is up to 30W, support a high-speed dome; support Web-based network management, support VLAN, QoS, RSTP, SNMP etc. network function; working temperature 40°C-75°C, strong level of protection from lightning, anti-interference. It fully satisfies the needs of security video surveillance project.


## Specification

<b>Model</b>	<b>S2008-150-V2</b>
<b>Power</b>	48 – 57 VDC from power adapter (included)
<b>Consumption</b>	Self-consumption < 30 W PoE output < 150 W
<b>Ethernet Port</b>	T1 – T8 RJ45: 10 / 100 / 1000 Base-T X1 – X4 SFP: 1000 Base-X
<b>PoE Standard</b>	IEEE802.3 af, IEEE802.3 at, End-Span
<b>PoE Output</b>	Each port < 30W
<b>Packet Forwarding Rate</b>	17.9 Mpps
<b>Switch Processing Scheme</b>	Store and Forward
<b>Packet Buffer</b>	4 Mb
<b>MAC Table</b>	8K
<b>Alarm</b>	Relay alarm for power loss, Ethernet link off, PoE link off
<b>Management</b>	L-2 network and PoE management
<b>Status indicator</b>	Power: 2 red LED RJ45: Link / acting: Green LED PoE: Yellow LED SFP: Link: Green LED
<b>Protection</b>	Surge: 6 kV, acc. IEC61000-4-5 EMC ESD: class 4, acc. IEC61000-4-2 EMC RS: class 4, acc. IEC61000-4-3 EMC EFT: class 4, acc. IEC61000-4-4 EMC CS: class 4, acc. IEC61000-4-6
<b>Work temperature</b>	-40 °C ~ 75 °C
<b>Storage temperature</b>	-40 °C ~ 85 °C
<b>Humidity (Non-condensing)</b>	0% - 95% (non-condensing)
<b>Dimension (LxWxH)</b>	157 mm x 110 mm x 46.5 mm
<b>Weight</b>	750 g
<b>Regulator</b>	CE, FCC, ROHS

## Package includes

<b>Designation</b>	<b>Quantity</b>
S2008-150-V2	1
Power Adapter	1
Accessory	1
User Manual	1

## Port configuration

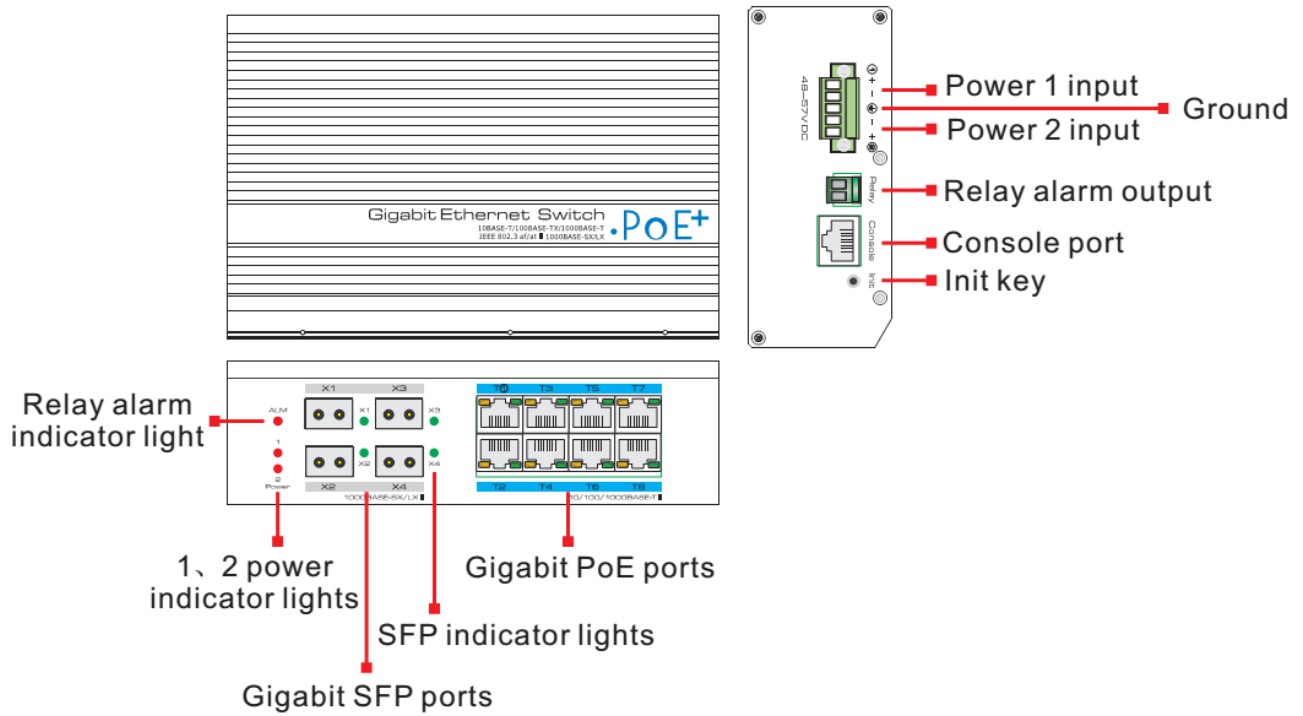

Para más información sobre Cygnus Electronics visite: [www.cygnus.la](http://www.cygnus.la) – Cygnus electronics y su respectivo logo son marcas registradas de Cygnus electronics y /o sus afiliados en la Argentina y otros países. Cualquier marca de terceros mencionada es propiedad de sus respectivos dueños.

**Impreso en Argentina**